




**PERFORMANCE CURVE**

**385 GPM**

**MODEL QF 125**

FLOW RANGE: 75 - 550 GPM      OUTLET SIZE: 5" NPT      NOMINAL DIA. 8"

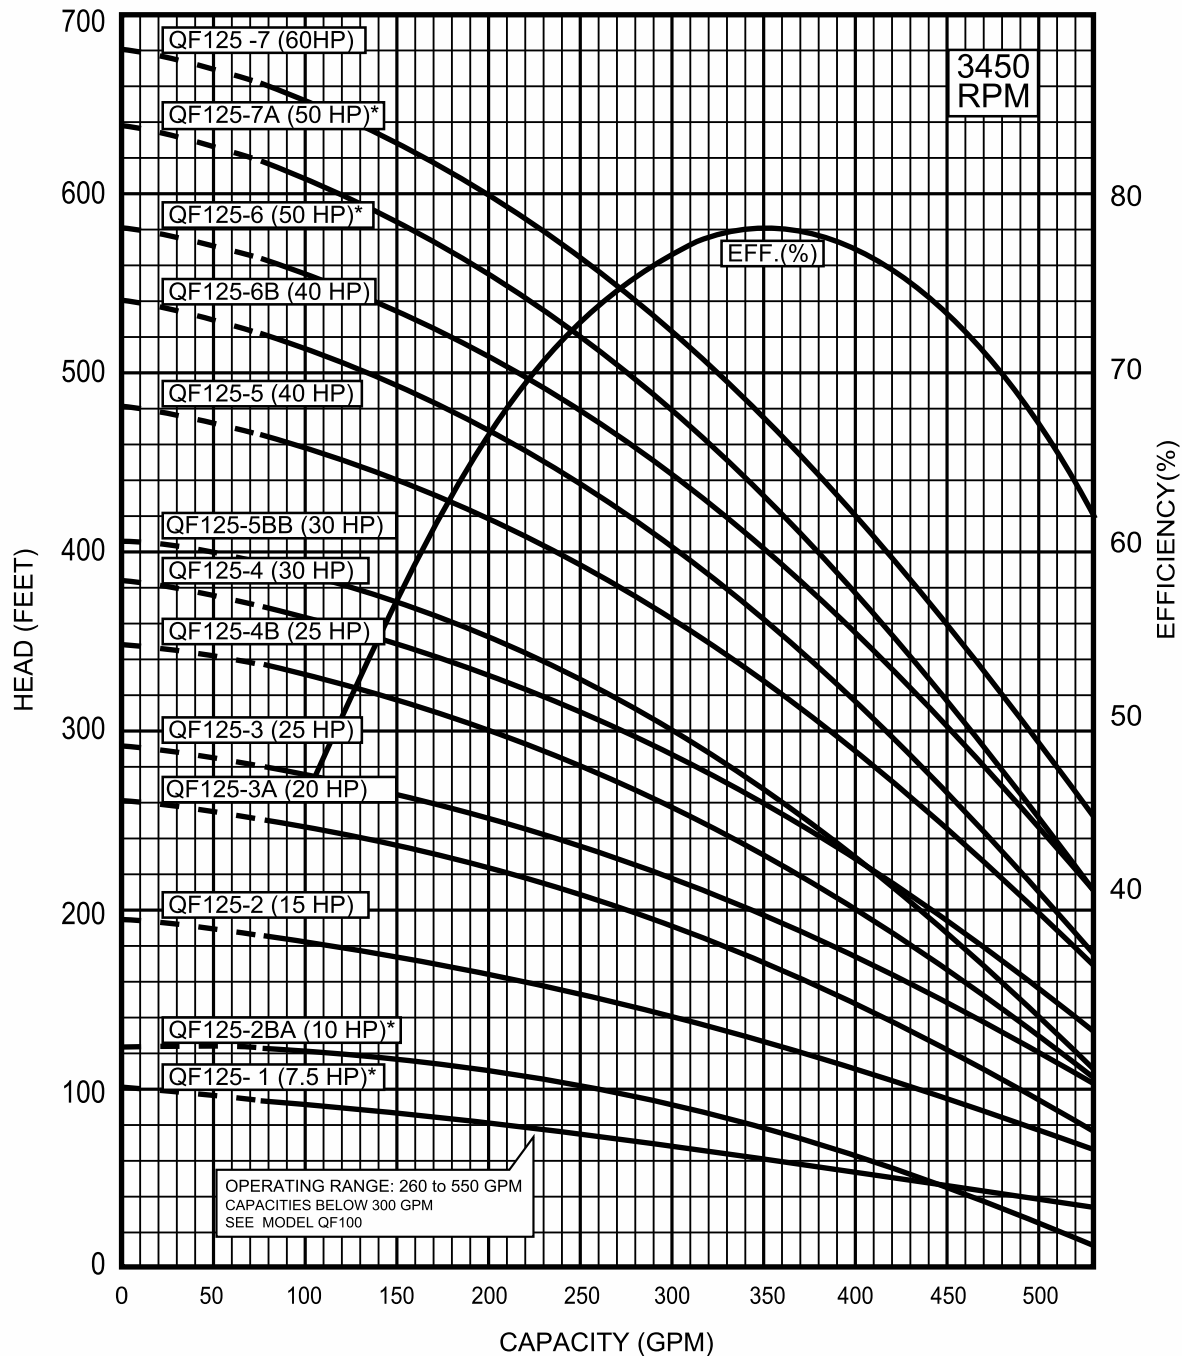

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
6" MOTOR STANDARD, 10-60 HP/3450 RPM.  
8" MOTOR STANDARD, 75-100 HP/3525 RPM.  
\* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A  
@ 8 ft. min. submergence.




**PERFORMANCE CURVE**

**385 GPM**

**MODEL QF 125**

FLOW RANGE: 75 - 550 GPM      OUTLET SIZE: 5" NPT      NOMINAL DIA. 8"

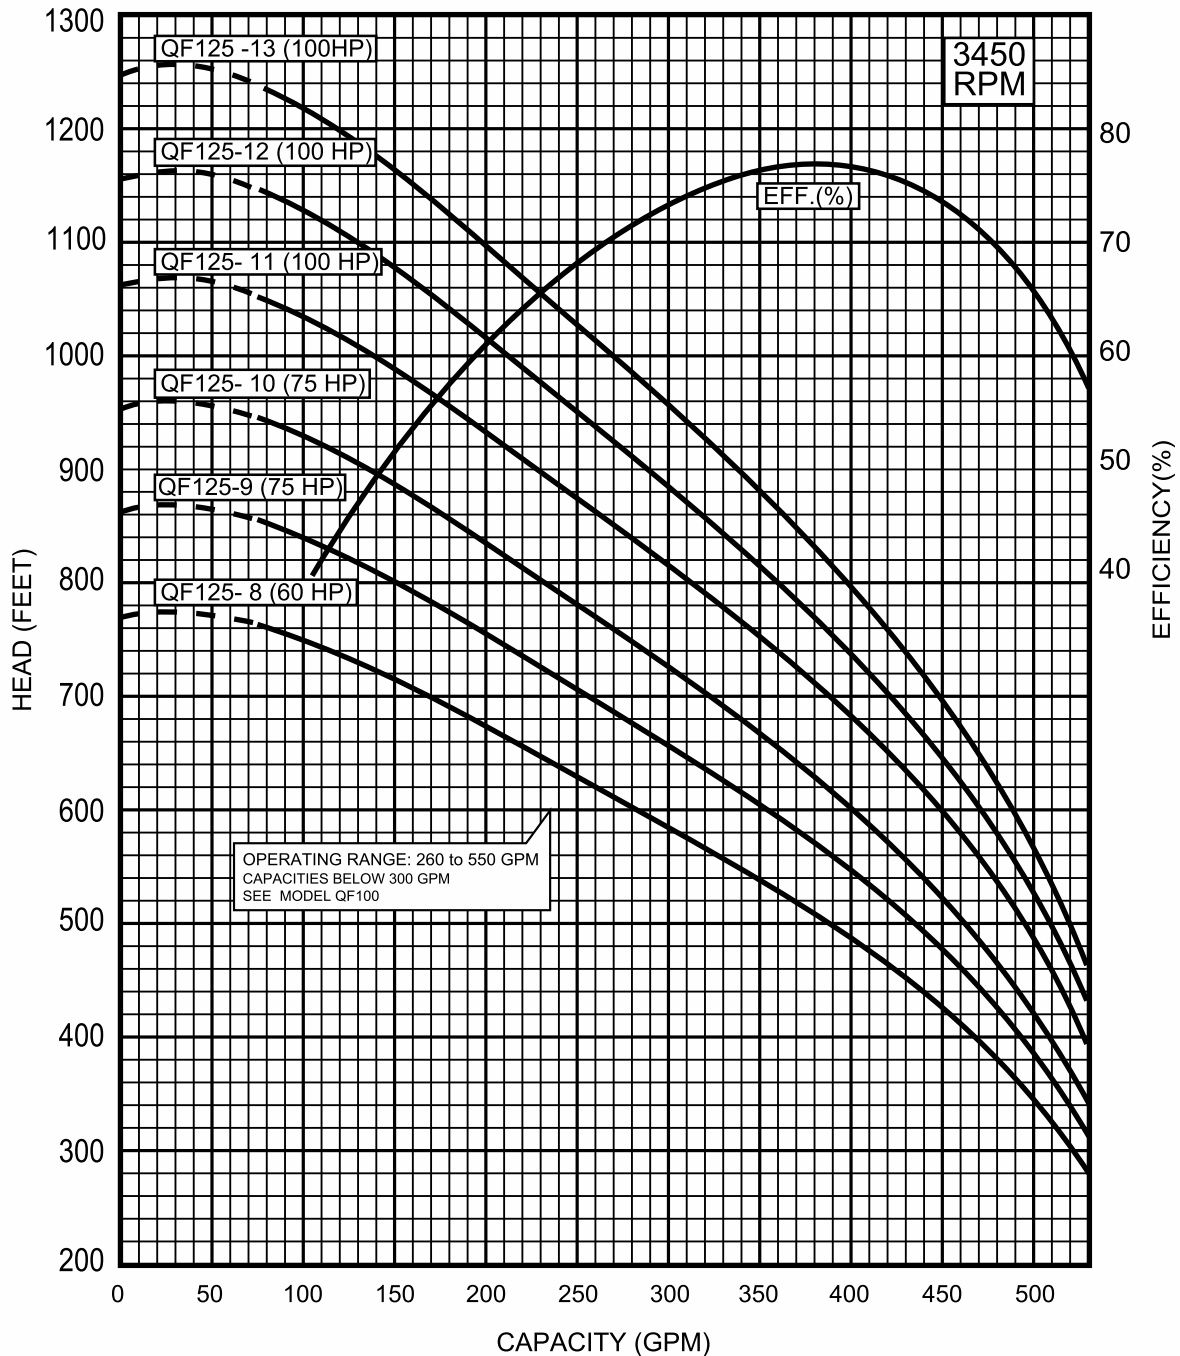

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
6" MOTOR STANDARD, 10-60 HP/3450 RPM.  
8" MOTOR STANDARD, 75-100 HP/3525 RPM.  
\* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A  
@ 8 ft. min. submergence.



**TECHNICAL DATA**

**385 GPM**

**MODEL QF 125**

**DIMENSIONS AND WEIGHTS**

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX SHIPPING WEIGHT (lbs)	
					A	B	C	D	E	PUMP	MOTOR
QF125-1	A	7.5	6"	5" NPT	48.8	24.2	24.6	5.4	7.0	51	99
QF125-2BA	A	10	6"	5" NPT	55.1	25.5	29.6	5.4	7.0	59	108
QF125-2	A	15	6"	5" NPT	57.6	28.0	29.6	5.4	7.0	59	119
QF125-3A	A	20	6"	4" NPT	65.2	30.6	34.6	5.4	7.0	69	132
QF125-3	A	25	6"	5" NPT	67.8	33.1	34.6	5.4	7.0	69	145
QF125-4-B	A	25	6"	5" NPT	72.8	33.1	39.7	5.4	7.0	78	145
QF125-4	A	30	6"	5" NPT	75.4	35.7	39.7	5.4	7.0	86	158
QF125-5BB	A	30	6"	5" NPT	80.4	35.7	44.7	5.4	7.0	91	158
QF125-5*	A	40	6"	5" NPT	88.0	43.3	44.7	5.4	7.0	93	220
QF125-6B	A	40	6"	5" NPT	93.0	43.3	49.8	5.4	7.0	103	220
QF125-6*	A	50	6"	5" NPT	108.3	58.5	49.8	5.4	7.0	105	308
QF125-7A	A	50	6"	5" NPT	113.3	58.5	54.8	5.4	7.0	114	308
QF125-7*	A	60	6"	5" NPT	119.4	64.6	54.8	5.4	7.0	114	352
QF125-8*	A	60	6"	5" NPT	124.4	64.6	59.8	5.4	7.0	124	352
QF125-9	A	75	8"	5" NPT	118.2	52.8	65.5	7.6	7.7	144	447
QF125-10	A	75	8"	5" NPT	123.3	52.8	70.5	7.6	7.7	154	447
QF125-11	A	100	8"	5" NPT	137.0	61.4	75.6	7.6	7.7	164	642
QF125-12	A	100	8"	5" NPT	142.0	61.4	80.6	7.6	7.7	174	642
QF125-13	A	100	8"	5" NPT	149.7	64.1	85.6	7.6	7.7	185	642

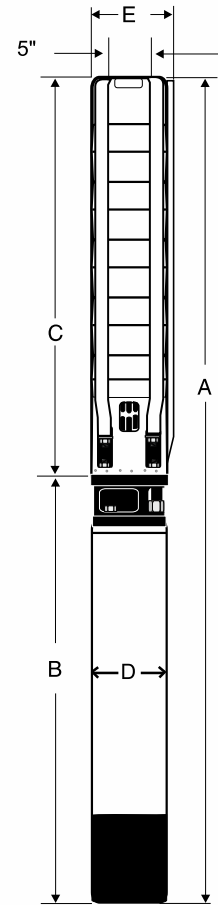


Fig. A

NOTES: All models suitable for use in 8" wells, unless otherwise noted.

\*Alternate motor sizes available.