



**PERFORMANCE CURVE**


**10 GPM**

**MODEL QF 2**

FLOW RANGE: 5 -14 GPM

OUTLET SIZE: 1 1/4" NPT

NOMINAL DIA. 4"

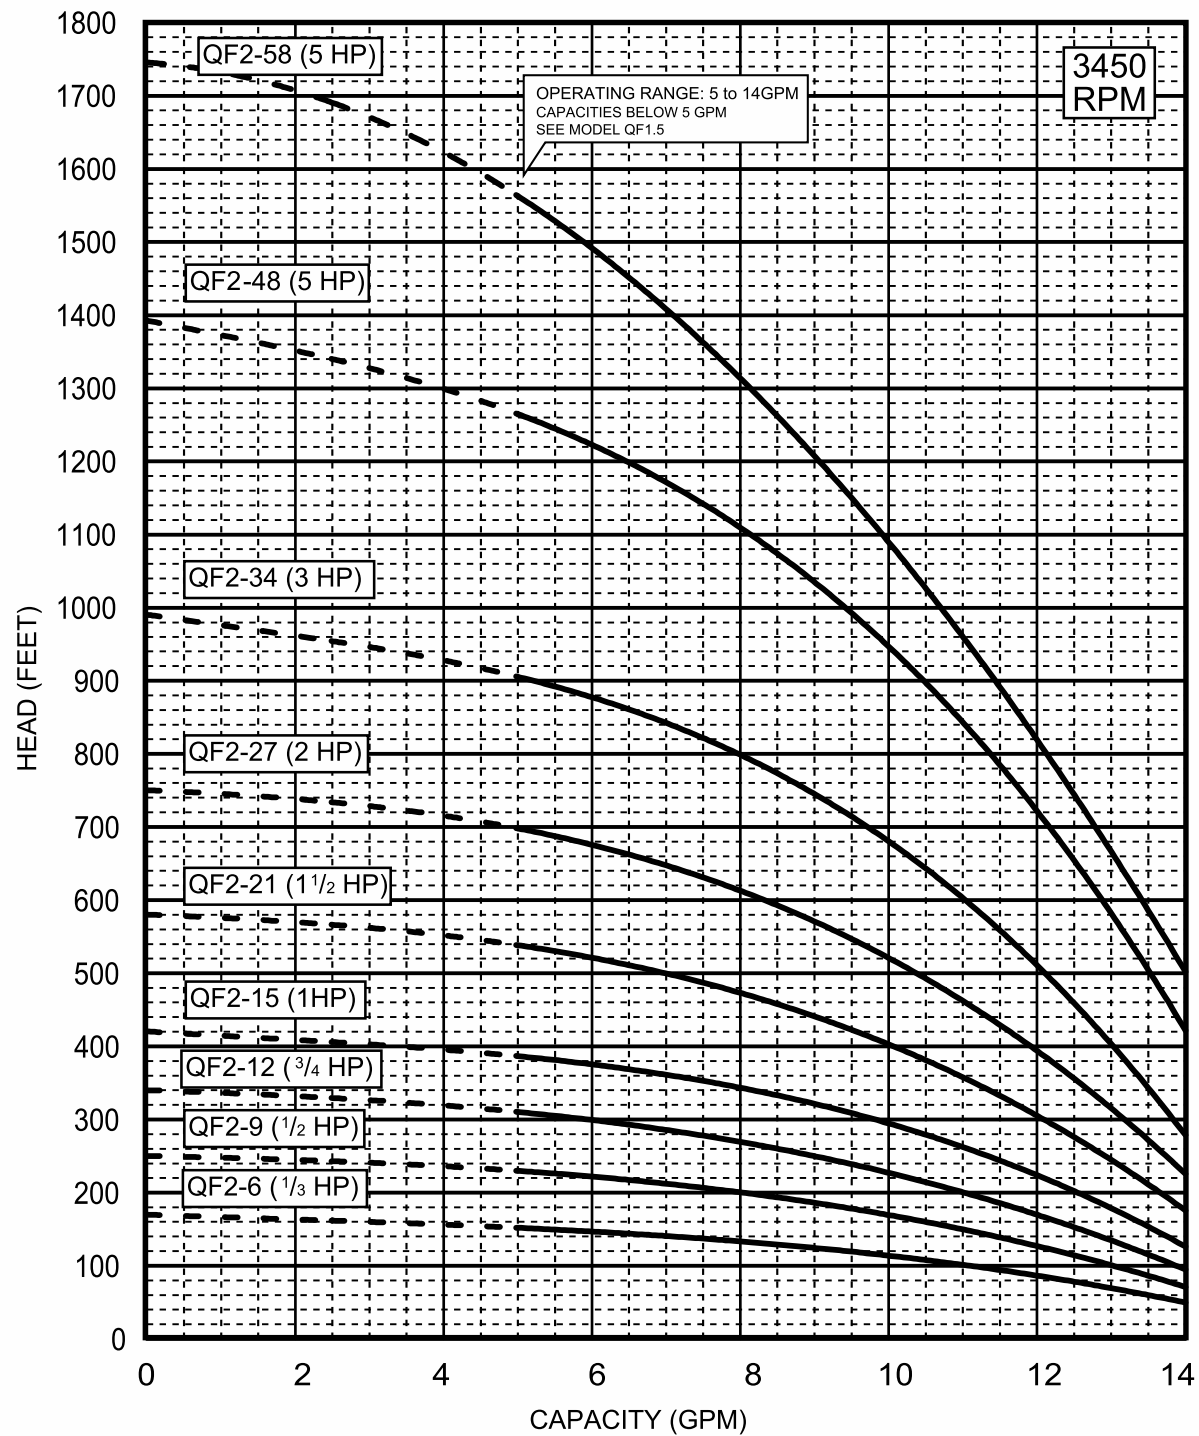

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
4" MOTOR STANDARD, 3450 RPM.

Performance conforms to ISO 9906 annex A  
@ 2 ft. min. submergence.



**TECHNICAL DATA**


**10 GPM**

**MODEL QF 2**

**2 WIRE**

**DIMENSIONS AND WEIGHTS**


MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX SHIPPING WEIGHT (lbs)	
						A	B	C	D	E	PUMP	MOTOR
QF2 - 6	A	0.5	4"	1	1 1/4" NPT	23.9	9.5	14.4	3.8	3.9	12	22
QF2 - 9	A	0.5	4"	1	1 1/4" NPT	26.4	9.5	16.9	3.8	3.9	14	22
QF2 - 12	A	0.8	4"	1	1 1/4" NPT	30.0	10.7	19.4	3.8	3.9	15	24
QF2 - 15	A	1	4"	1	1 1/4" NPT	33.3	11.5	21.9	3.8	3.9	17	26
QF2 - 21	A	1.5	4"	1	1 1/4" NPT	41.6	14.8	26.8	3.8	3.9	21	35

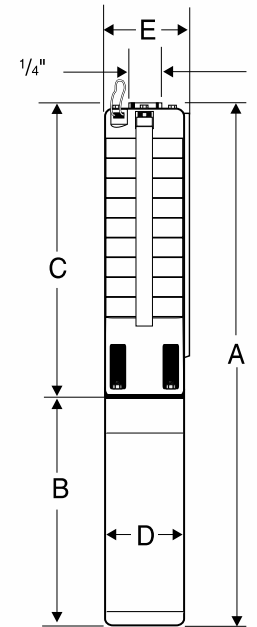

**Fig. A**

**3 WIRE**

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX SHIPPING WEIGHT (lbs)	
						A	B	C	D	E	PUMP	MOTOR
QF2 - 6	A	0.5	4"	1/3	1 1/4" NPT	23.9	9.5	14.4	3.8	3.9	12	22
						25.1	10.7					24
QF2 - 9	A	0.5	4"	1/3	1 1/4" NPT	26.4	9.5	16.9	3.8	3.9	14	22
						27.5	10.7					24
QF2 - 12	A	0.8	4"	1/3	1 1/4" NPT	30.8	11.5	19.4	3.8	3.9	15	24
						30.0	10.7					24
QF2 - 15	A	1	4"	1/3	1 1/4" NPT	33.3	11.5	21.9	3.8	3.9	17	26
						31.2	11.5					26
QF2 - 21	A	1.5	4"	1/3	1 1/4" NPT	40.2	13.3	26.8	3.8	3.9	21	33
						40.2	13.3					33
QF2 - 27	A	2	4"	1/3	1 1/4" NPT	47.7	15.9	31.8	3.8	3.9	24	37
						47.7	15.9					37
QF2 - 34	A	3	4"	1/3	1 1/4" NPT	58.7	21.2	37.6	3.8	3.9	28	53
						58.7	21.2					53
QF2 - 48	A	5	4"	1/3	1 1/4" NPT	76.3	27.2	49.1	3.8	3.9	37	68
						71.9	22.8					57
QF2 - 58*	B	5	4"	1/3	1 1/4" MPT	84.6	27.2	57.4	3.8	4.3	43	68
						80.2	22.8					57

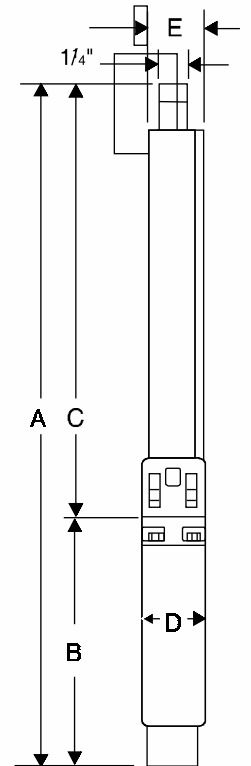

**Fig. B**

NOTES: All models suitable for use in 4" wells, unless otherwise noted.

\* Built into sleeve 1 1/4" MPT discharge, 5" min. well dia.