




PERFORMANCE CURVE

625 GPM

MODEL QF 210

FLOW RANGE: 125 - 850 GPM OUTLET SIZE: 6" NPT NOMINAL DIA. 10"

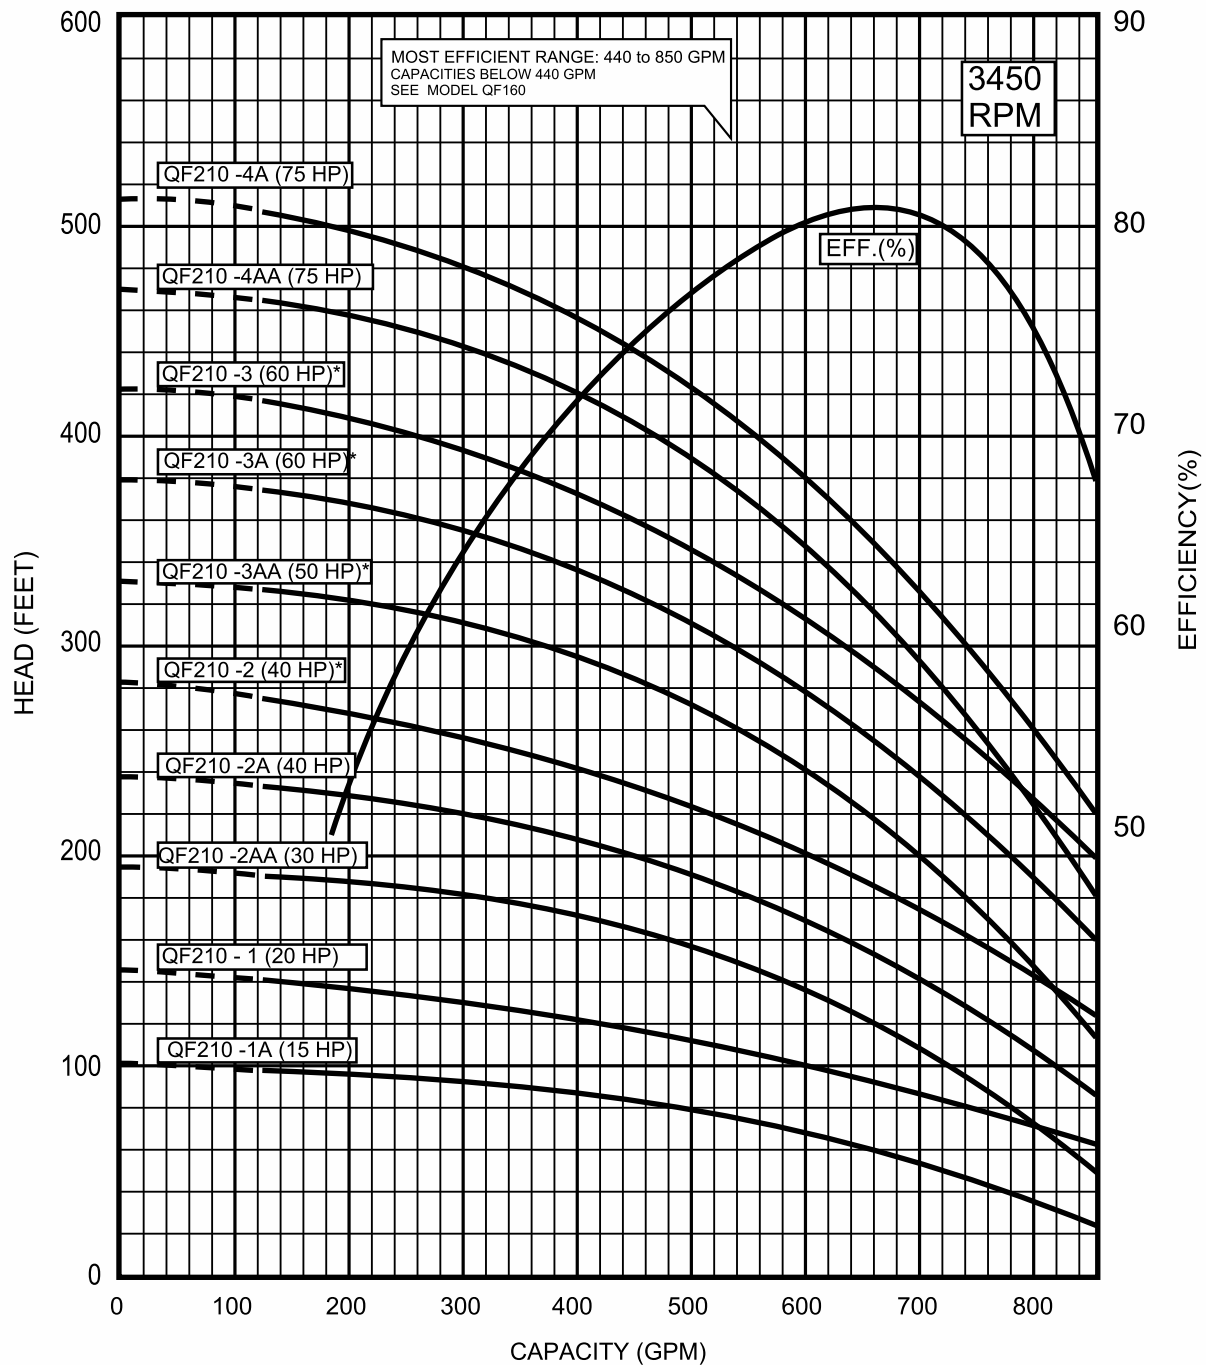

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 15-60 HP/3450 RPM.
8" MOTOR STANDARD, 75-150 HP/3525 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 10 ft. min. submergence.




PERFORMANCE CURVE

625 GPM

MODEL QF 210

FLOW RANGE: 125 - 850 GPM OUTLET SIZE: 6" NPT NOMINAL DIA. 10"

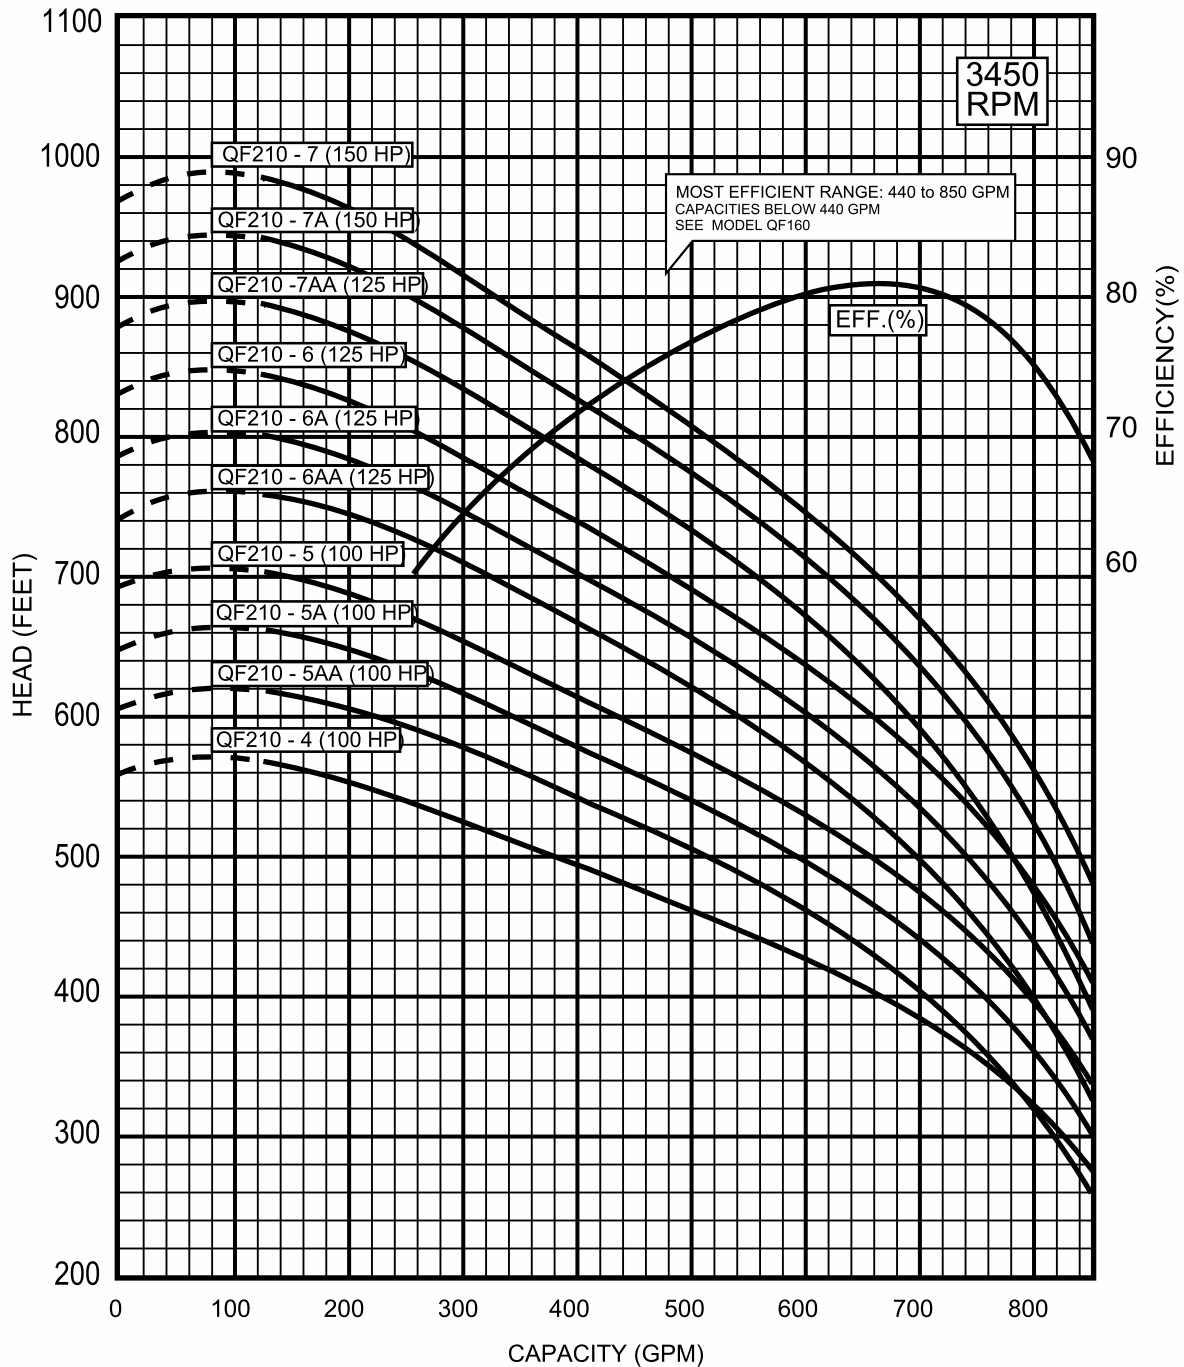

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 15-60 HP/3450 RPM.
8" MOTOR STANDARD, 75-150 HP/3525 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 10 ft. min. submergence.



TECHNICAL DATA

625 GPM

MODEL QF 210

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX SHIPPING WEIGHT (lbs)	
					A	B	C	D	E	PUMP	MOTOR
QF210-1A	A	15	6"	6" NPT	53.5	28.0	25.5	5.4	8.3	64	119
QF210-1	A	20	6"	6" NPT	56.1	30.6	25.5	5.4	8.3	64	132
QF210-2AA	A	30	6"	6" NPT	67.4	35.7	31.7	5.4	8.3	78	158
QF210-2A	A	40	6"	6" NPT	74.9	43.3	31.7	5.4	8.3	78	220
QF210-2*	A	50	6"	6" NPT	90.2	58.5	31.7	5.4	8.3	78	308
QF210-3AA*	A	50	6"	6" NPT	96.3	58.5	37.8	5.4	8.6	91	308
QF210-3A*	A	60	8"	6" NPT	86.0	48.4	37.6	5.4	8.6	91	416
QF210-3*	A	75	8"	6" NPT	90.3	52.8	37.6	5.4	8.6	91	447
QF210-4-AA	A	75	8"	6" NPT	96.5	52.8	43.7	7.6	8.6	105	447
QF210-4-A	A	100	8"	6" NPT	105.1	61.4	43.7	7.6	8.6	105	642
QF210-4	A	100	8"	6" NPT	105.1	61.4	43.7	7.6	8.6	105	642
QF210-5-AA	A	100	8"	6" NPT	111.2	61.4	49.8	7.6	8.6	119	642
QF210-5-A	A	100	8"	6" NPT	111.2	61.4	49.8	7.6	8.6	119	642
QF210-5	A	100	8"	6" NPT	111.2	61.4	49.8	7.6	8.6	119	642
QF210-6-AA	A	125	8"	6" NPT	124.5	68.5	56.0	7.7	8.6	149	642
QF210-6-A	A	125	8"	6" NPT	124.5	68.5	56.0	7.7	8.6	149	642
QF210-6	A	125	8"	6" NPT	124.5	68.5	56.0	7.7	8.6	149	642
QF210-7-AA	A	125	8"	6" NPT	130.6	68.5	62.1	7.7	8.6	165	642
QF210-7-A	A	150	8"	6" NPT	122.2	60.1	62.1	7.7	8.6	165	739
QF210-7	A	150	8"	6" NPT	122.2	60.1	62.1	7.7	8.6	165	739

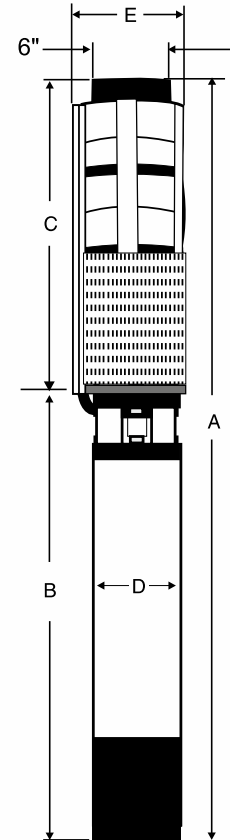


Fig. A

NOTES: All models suitable for use in 8" wells unless otherwise noted.
*Alternate motor sizes available.