




PERFORMANCE CURVE

75 GPM

MODEL QF 25

FLOW RANGE: 45 - 95 GPM OUTLET SIZE: 2" NPT NOMINAL DIA.: 4"

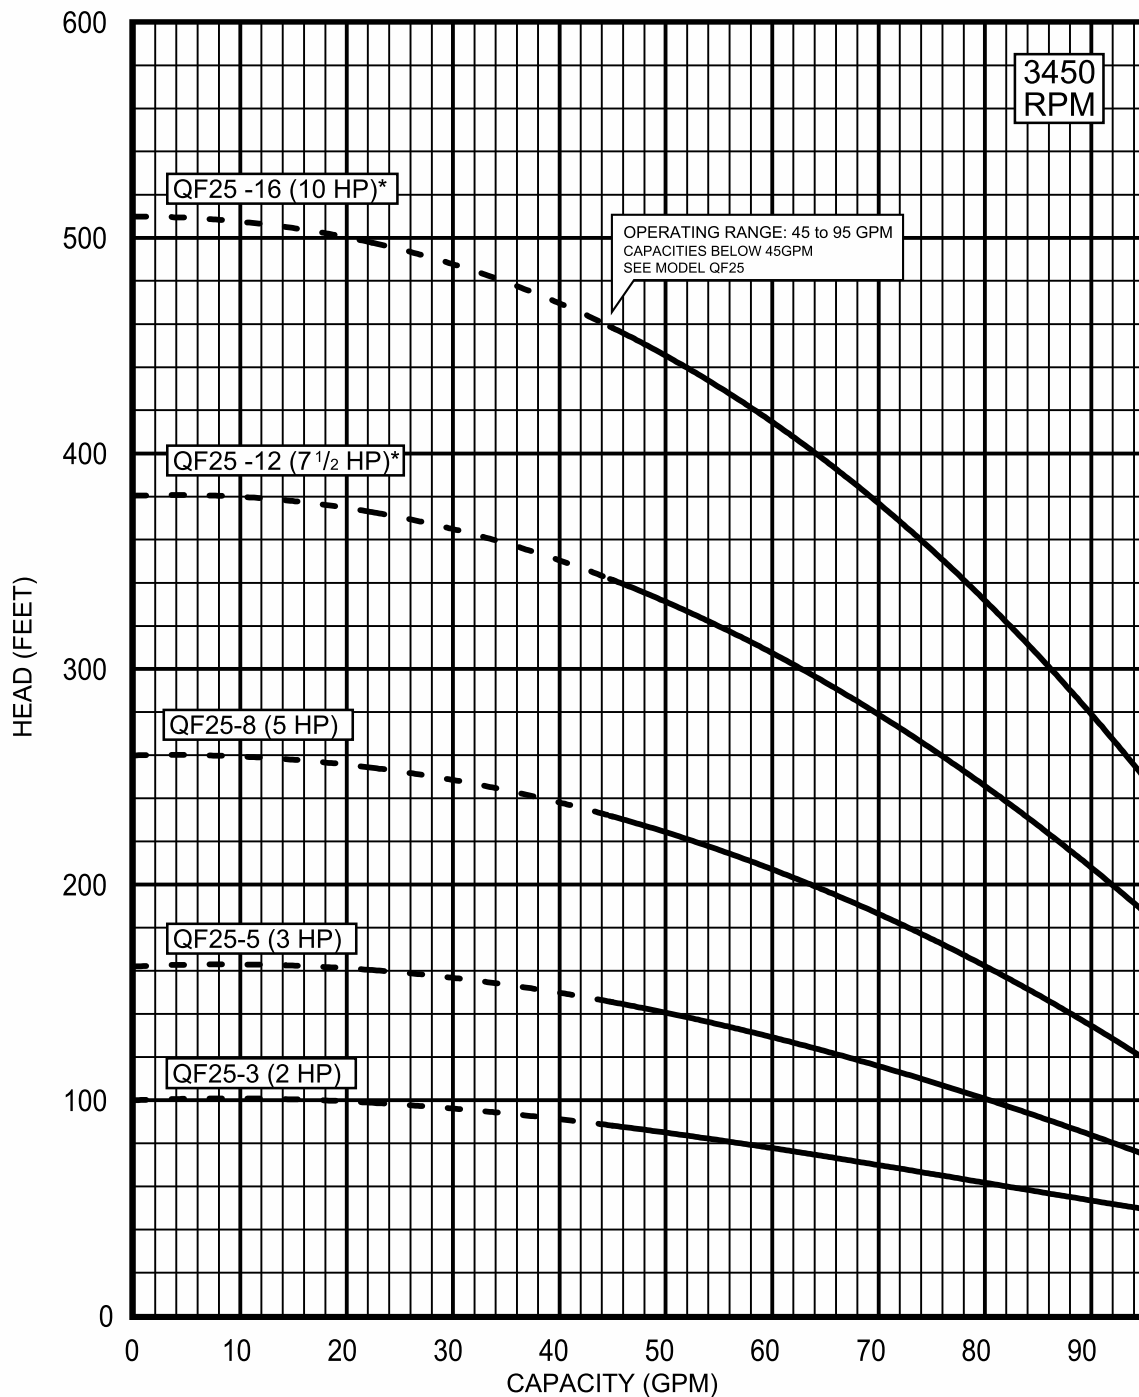

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

4" motor standard, 2-10 HP/3450 RPM

* Also available with 6" motor. Performance is the same only at Best Efficiency Point.

Consult factory for actual performance.

Performance conforms to ISO 9906 Annex A @ 5 ft. min. submergence.



PERFORMANCE CURVE

75 GPM

MODEL QF 25

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX	
						A	B	C	D	E	PUMP	MOTOR
QF25-3	A	2	4"	1	2" NPT	33.1	15.9	17.2	3.8	3.9	15	37
				3		33.1	15.9					37
QF25-5	A	3	4"	1	2" NPT	43.5	21.2	22.3	3.8	3.9	18	53
				3		43.5	21.2					53
QF25-8	A	5	4"	1	2" NPT	57.1	27.2	30.0	3.8	3.9	23	68
				3		52.7	22.8					57
QF25-12*	A	7.5	4"	3	2" NPT	70.4	30.2	40.2	3.8	3.9	29	77
QF25-16*	A	10	4"	3	2" NPT	82.9	32.5	50.4	3.8	3.9	36	84

NOTES: All models suitable for use in 4" wells, unless otherwise noted.
* Also available with 6" motor. Performance is the same only at Best Efficiency Point.
Consult factory for actual performance.

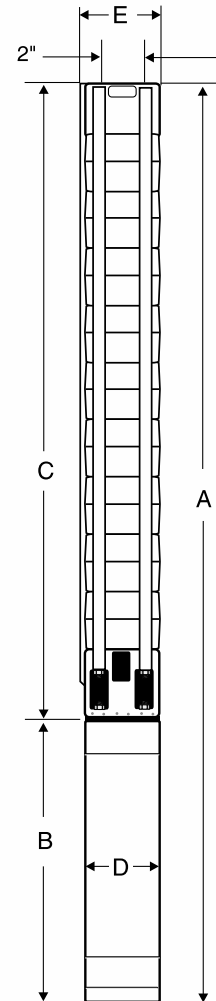


Fig. A