




PERFORMANCE CURVE

1100 GPM

MODEL QF 360

FLOW RANGE: 220 -1400 GPM OUTLET SIZE: 6 " NPT NOMINAL DIA. 10"

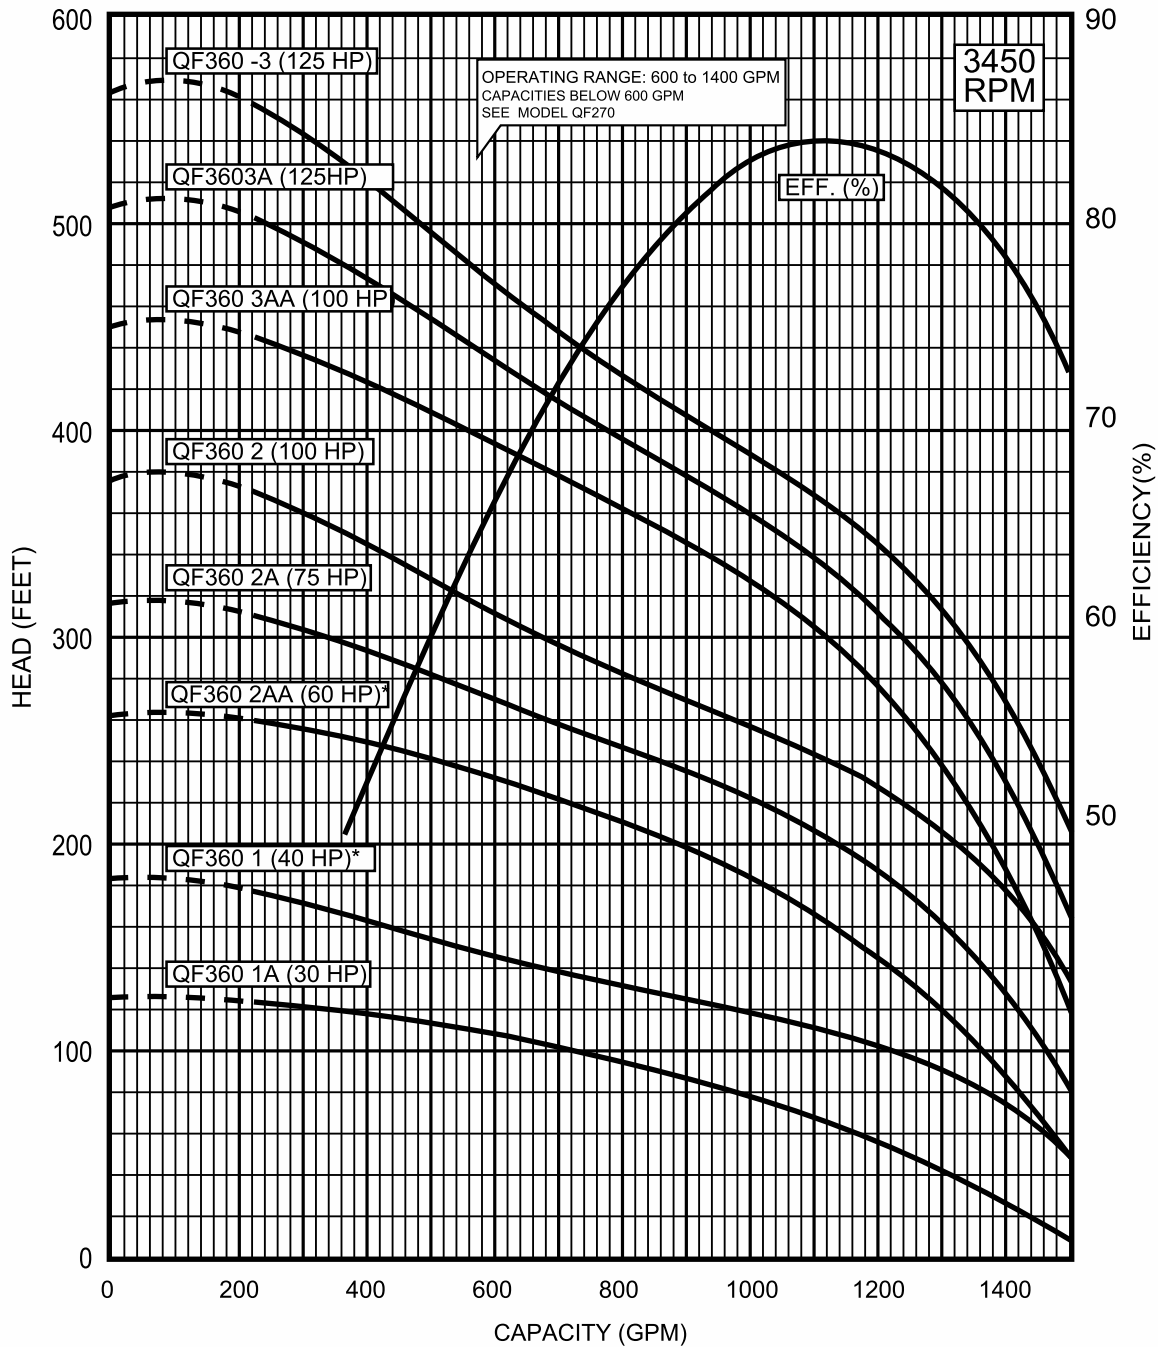

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 40 HP/3450 RPM.
8" MOTOR STANDARD, 60-200 HP/3525 RPM.
10" MOTOR STANDARD, 250 HP/3500 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 10 ft. min. submergence.




PERFORMANCE CURVE

1100 GPM

MODEL QF 360

FLOW RANGE: 220 -1400 GPM OUTLET SIZE: 6 " NPT NOMINAL DIA. 10"

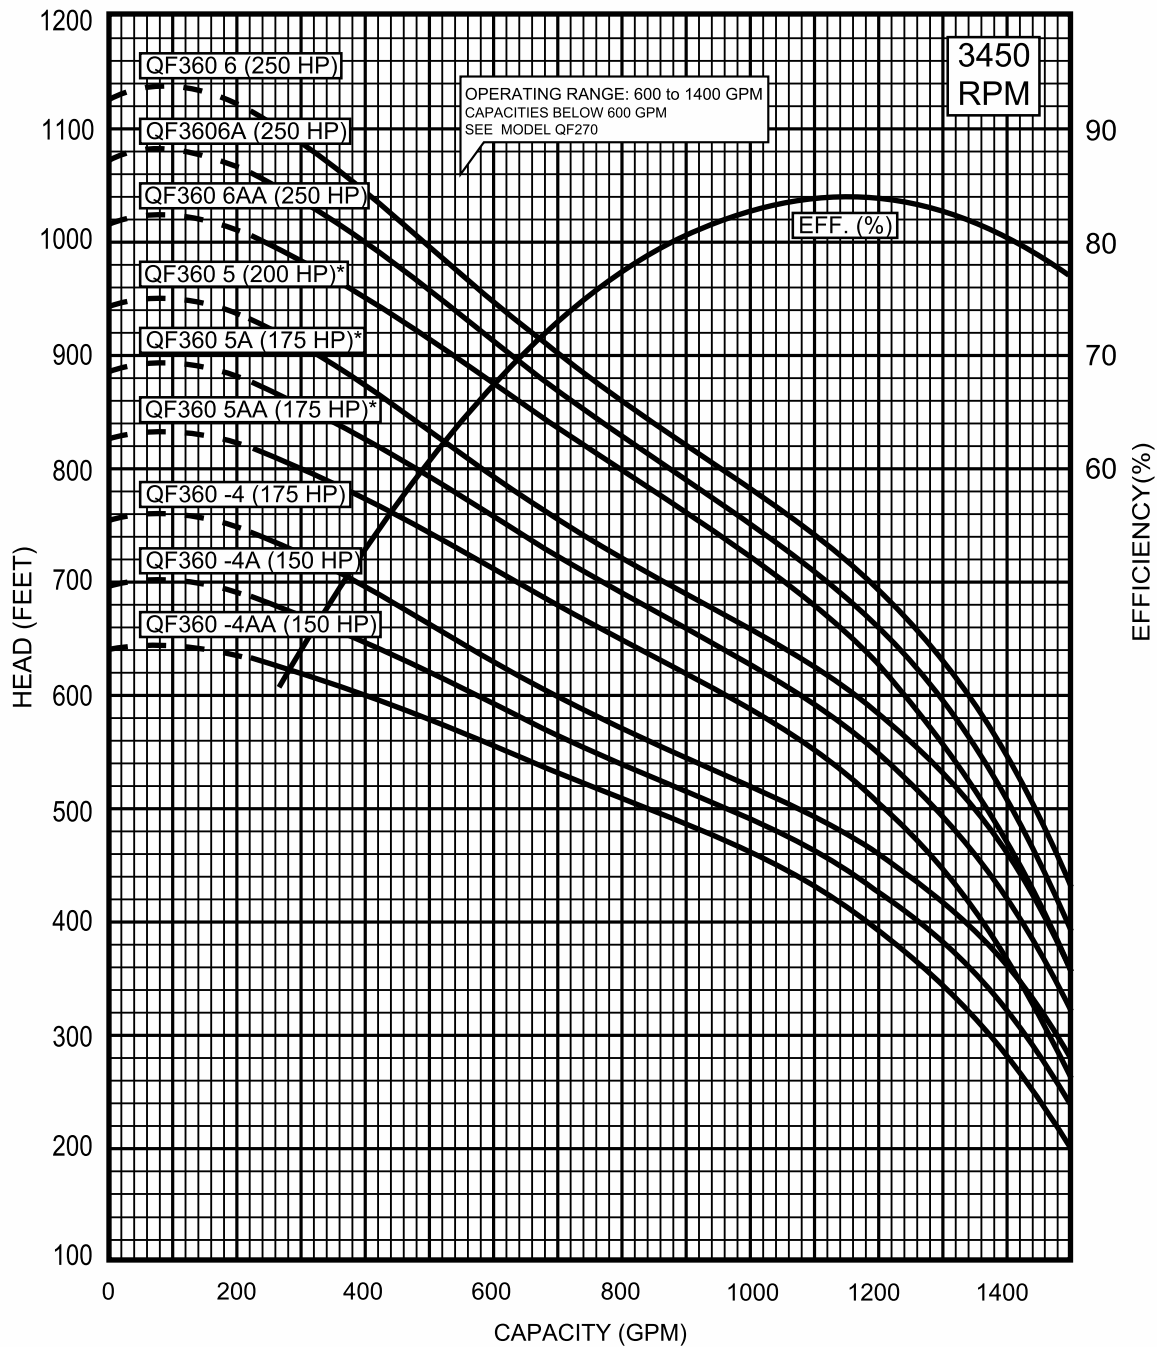

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 40 HP/3450 RPM.
8" MOTOR STANDARD, 60-200 HP/3525 RPM.
10" MOTOR STANDARD, 250 HP/3500 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 10 ft. min. submergence.



TECHNICAL DATA

1100 GPM

MODEL QF 360

DIMENSIONS AND WEIGHTS

| MODEL NO. | FIG. | HP | MOTOR SIZE | DISCH. SIZE | DIMENSIONS IN INCHES | | | | | APPROX SHIPPING WEIGHT (lbs) | |
|------------|------|-----|------------|-------------|----------------------|------|------|-----|------|------------------------------|-------|
| | | | | | A | B | C | D | E | PUMP | MOTOR |
| QF360-1A | A | 30 | 6" | 6" NPT | 64.4 | 35.7 | 28.7 | 5.4 | 9.7 | 114 | 158 |
| QF360-1* | A | 40 | 6" | 6" NPT | 72.0 | 43.3 | 28.7 | 5.4 | 9.7 | 114 | 220 |
| QF360-2AA* | A | 60 | 8" | 6" NPT | 86.7 | 48.4 | 38.3 | 5.4 | 9.7 | 157 | 416 |
| QF360-2A | A | 75 | 8" | 6" NPT | 91.0 | 52.8 | 38.3 | 7.6 | 9.7 | 157 | 447 |
| QF360-2 | A | 100 | 8" | 6" NPT | 99.7 | 61.4 | 38.3 | 7.6 | 9.7 | 157 | 642 |
| QF360-3AA | A | 100 | 8" | 6" NPT | 106.6 | 61.4 | 45.2 | 7.6 | 9.7 | 181 | 642 |
| QF360-3A | A | 125 | 8" | 6" NPT | 113.7 | 68.5 | 45.2 | 7.7 | 9.7 | 181 | 642 |
| QF360-3 | A | 125 | 8" | 6" NPT | 113.7 | 68.5 | 45.2 | 7.7 | 9.7 | 181 | 642 |
| QF360-4AA | A | 150 | 10" | 6" NPT | 112.2 | 60.1 | 52.1 | 7.7 | 9.7 | 215 | 739 |
| QF360-4A | A | 150 | 10" | 6" NPT | 112.2 | 60.1 | 52.1 | 7.7 | 9.7 | 215 | 739 |
| QF360-4 | A | 175 | 10" | 6" NPT | 117.4 | 65.3 | 52.1 | 7.7 | 9.7 | 215 | 906 |
| QF360-5AA* | A | 175 | 10" | 6" NPT | 124.4 | 65.3 | 59.1 | 7.7 | 9.7 | 237 | 906 |
| QF360-5A* | A | 175 | 10" | 6" NPT | 124.4 | 65.3 | 59.1 | 7.7 | 9.7 | 237 | 906 |
| QF360-5* | A | 200 | 10" | 6" NPT | 128.7 | 69.6 | 59.1 | 7.7 | 9.7 | 237 | 961 |
| QF360-6AA | A | 250 | 10" | 6" NPT | 141.5 | 75.6 | 66.0 | 9.1 | 10.9 | 268 | 1056 |
| QF360-6A | A | 250 | 10" | 6" NPT | 134.6 | 75.6 | 59.1 | 9.1 | 10.9 | 246 | 1056 |
| QF360-6 | A | 250 | 10" | 6" NPT | 141.5 | 75.6 | 66.0 | 9.1 | 10.9 | 268 | 1056 |

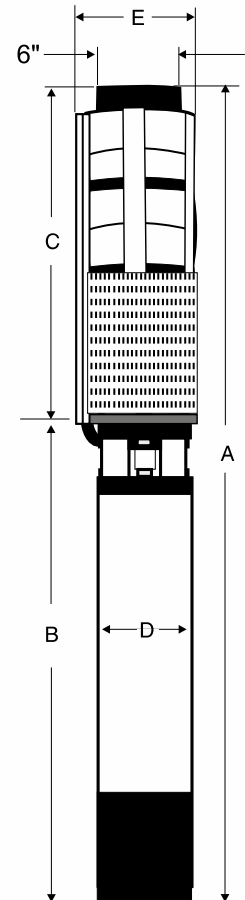


Fig. A

NOTES: All models suitable for use in 10" wells, unless equipped with 10" motor.
* Alternate motor sizes available.