




**PERFORMANCE CURVE**

**25 GPM**

**MODEL QF 6**

FLOW RANGE: 18 -32 GPM      OUTLET SIZE: 1 1/2 " NPT      NOMINAL DIA. 4"

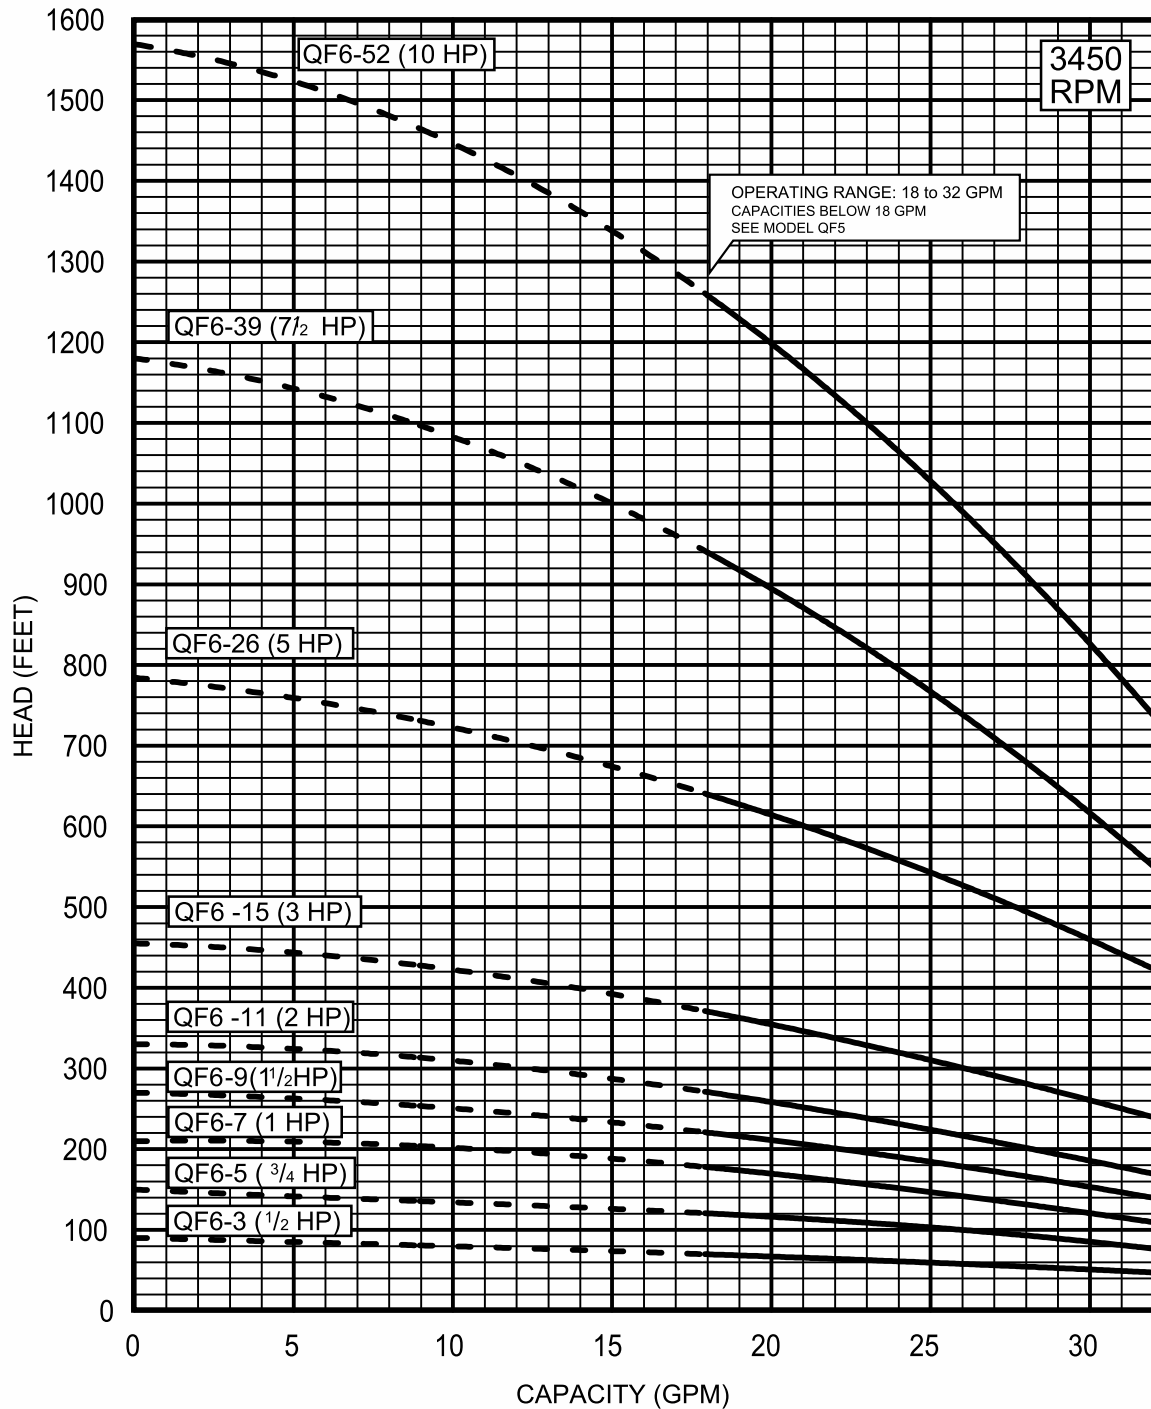

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
4" MOTOR STANDARD, .5-5 HP/3450 RPM.  
6" MOTOR STANDARD, 7.5-10HP/3450 RPM.

Performance conforms to ISO 9906 Annex A  
@ 2 ft. min. submergence.



**TECHNICAL DATA**

**25GPM**

**MODEL QF 6**

**2 WIRE**

**DIMENSIONS AND WEIGHTS**

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHS					APPROX SHIPPING WEIGHT (lbs)	
						A	B	C	D	E	PUMP	MOTOR
QF6 -3	A	0.5	4"	1	1 1/2" NPT	21.5	9.5	12.0	3.8	3.9	11	22
QF6 -5	A	0.75	4"	1	1 1/2" NPT	24.3	10.7	13.6	3.8	3.9	12	24
QF6- 7	A	1	4"	1	1 1/2" NPT	26.7	11.5	15.3	3.8	3.9	13	26
QF6-9	A	1.5	4"	1	1 1/2" NPT	31.7	14.8	16.9	3.8	3.9	14	35

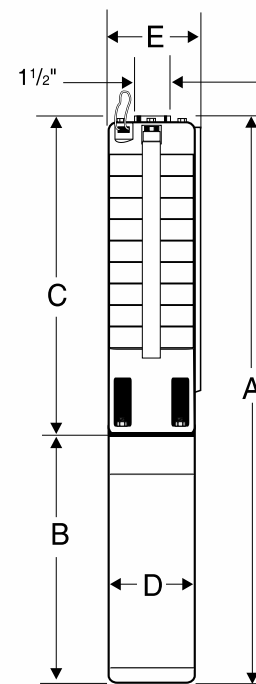


Fig. A

**3 WIRE**

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHS					APPROX SHIPPING WEIGHT (lbs)	
						A	B	C	D	E	PUMP	MOTOR
QF6 -3	A	0.5	4"	1/3	1 1/2" NPT	21.5	9.5	12.0	3.8	3.9	11	22
						22.7	10.7					24
QF6 -5	A	0.75	4"	1/3	1 1/2" NPT	25.1	11.5	13.6	3.8	3.9	12	24
						25.1	11.5					24
QF6- 7	A	1	4"	1/3	1 1/2" NPT	26.7	11.5	15.3	3.8	3.9	13	26
						26.7	11.5					26
QF6-9	A	1.5	4"	1/3	1 1/2" NPT	30.3	13.3	16.9	3.8	3.9	14	26
						30.3	13.3					26
QF6-11	A	2	4"	1/3	1 1/2" NPT	34.5	15.9	18.6	3.8	3.9	15	37
						34.5	15.9					37
QF6-15	A	3	4"	1/3	1 1/2" NPT	43.1	21.2	21.9	3.8	3.9	17	53
						43.1	21.2					53
QF6-26	A	5	4"	1/3	1 1/2" NPT	58.1	27.2	30.9	3.8	3.9	23	68
						58.1	27.2					57
QF6-39*	A	7.5	6"	3	1 1/2" NPT	65.9	24.2	41.7	5.4	4.6	30	99
QF6-52*	B	10	6"	3	1 1/2" NPT	77.8	25.5	52.4	5.4	5.4	37	108

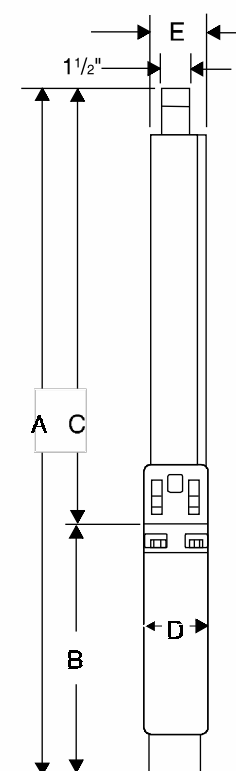


Fig. B

NOTES: All models suitable for use in 4" wells, unless otherwise noted.

\* Built into sleeve 1 1/2" MPT discharge, 6" min. well dia.