




**PERFORMANCE CURVE**

**40 GPM**

**MODEL QF 12**

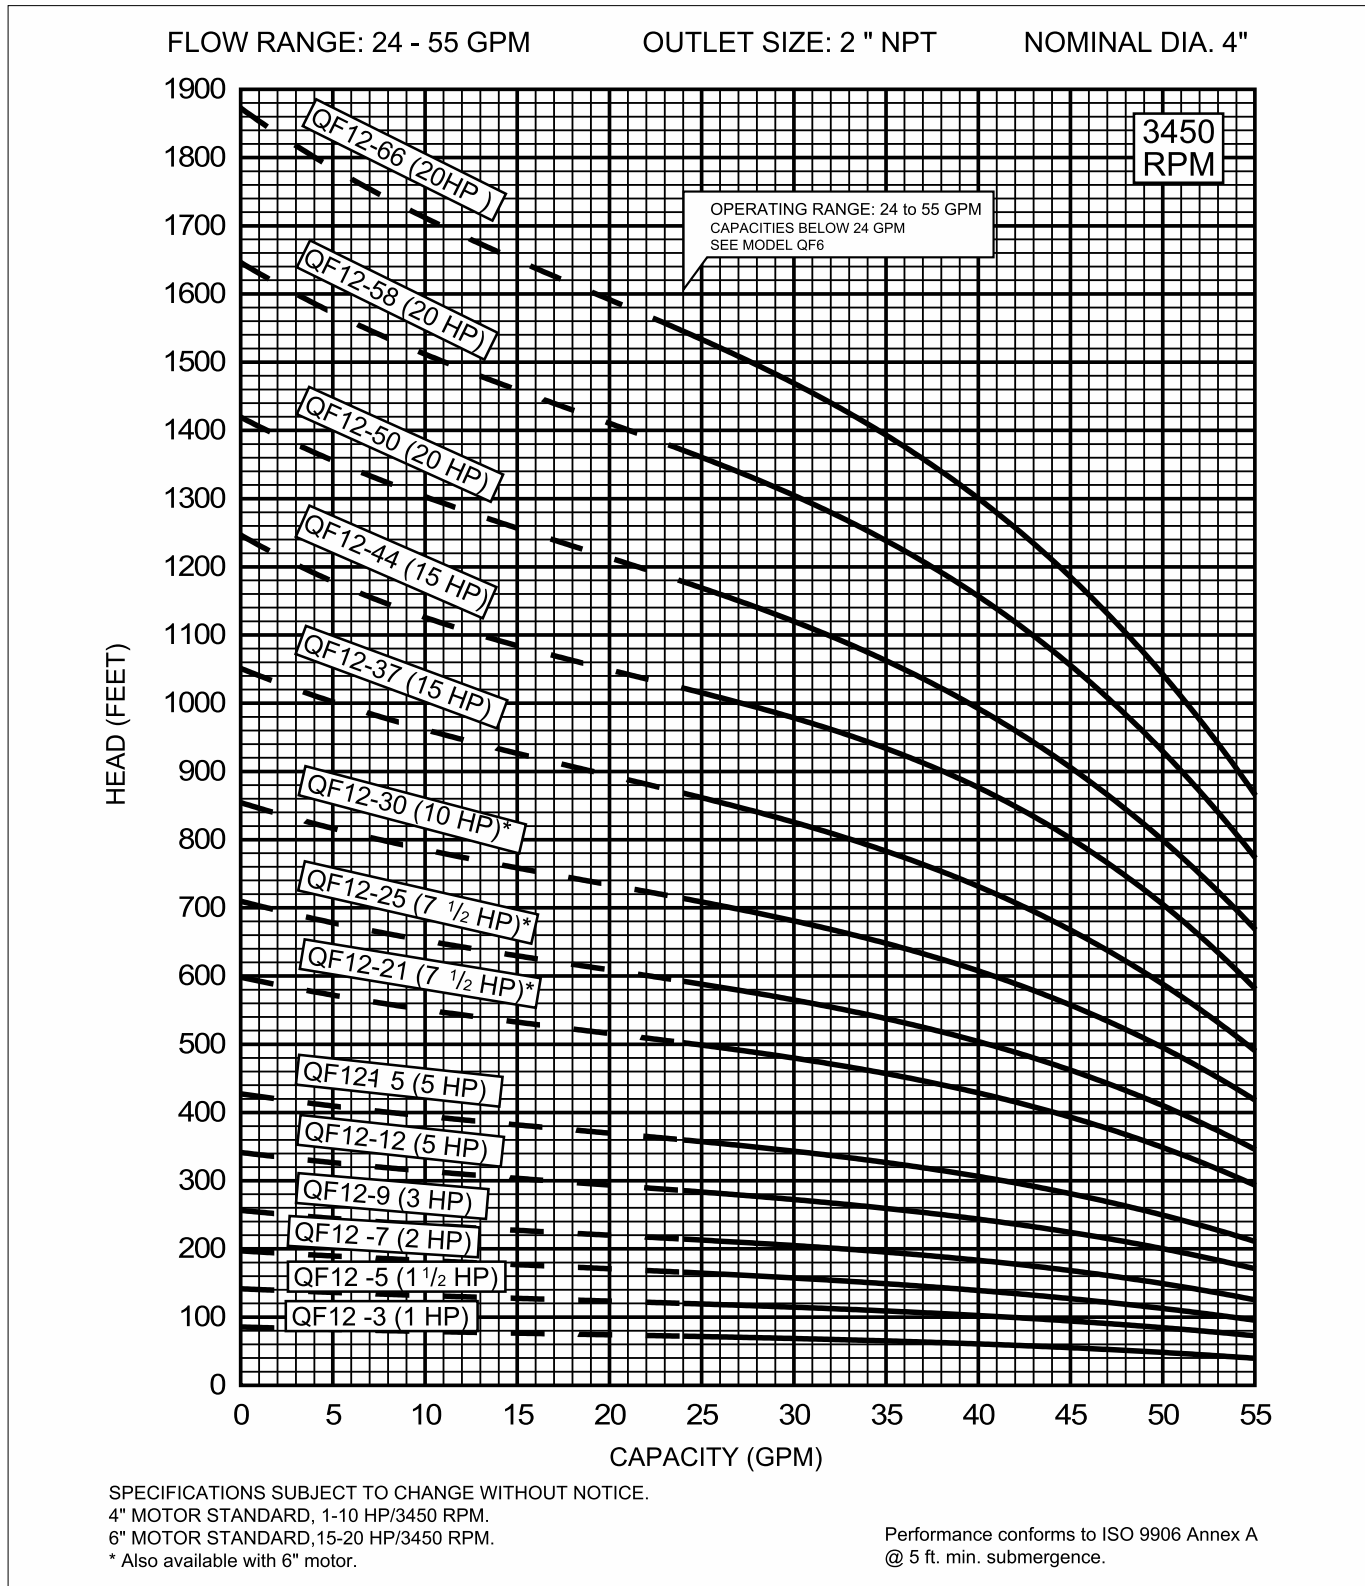



**TECHNICAL DATA**

**40 GPM**

**MODEL QF 12**

**DIMENSIONS AND WEIGHTS**

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX	
						A	B	C	D	E	PUMP	MOTOR
QF12 -3	A	1	4"	1/3	2" NPT	26.1	11.5	14.6	3.8	3.9	13	26
						26.1	11.5					26
QF12 -5	A	1.5	4"	1/3	2" NPT	31.3	13.3	17.9	3.8	3.9	15	33
						31.3	13.3					33
QF12 -7	A	2	4"	1/3	2" NPT	37.1	15.9	21.2	3.8	3.9	18	37
						37.1	15.9					37
QF12 -9	A	3	4"	1/3	2" NPT	45.6	21.2	24.4	3.8	3.9	20	53
						45.6	21.2					53
QF12 -12	A	5	4"	1/3	2" NPT	56.5	27.2	29.4	3.8	3.9	23	68
						52.1	22.8					57
QF12 -15	A	5	4"	1/3	2" NPT	61.4	27.2	34.3	3.8	3.9	27	68
						57.0	22.8					57
QF12 -21*	A	7.5	4"	3	2" NPT	74.2	30.2	44.1	3.8	3.9	34	77
QF12 -25*	A	7.5	4"	3	2" NPT	80.8	30.2	50.6	3.8	3.9	38	77
QF12 -30*	A	10	4"	3	2" NPT	86.8	32.5	58.8	3.8	3.9	46	84
QF12 -37	A	15	6"	3	2" NPT	100.9	28.0	72.9	5.4	5.4	58	119
QF12 -44	A	15	6"	3	2" NPT	112.5	28.0	84.5	5.4	5.4	68	119
QF12 -50**	B	20	6"	3	2" MPT	125.0	30.6	94.4	5.4	5.5	77	132
QF12 -58**	B	20	6"	3	2" MPT	138.2	30.6	107.6	5.4	5.5	86	132
QF12 -66**	B	20	6"	3	2" MPT	151.5	30.6	120.9	5.4	5.5	96	132

NOTES: All models suitable for use in 4" wells, unless otherwise noted.

\* Also available with 6" motor.

\*\* Built into sleeve 2" MPT discharge, 6" min. well dia.

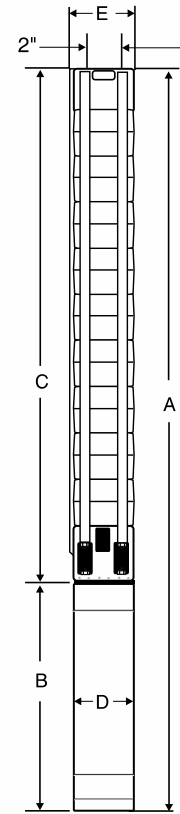


Fig. A

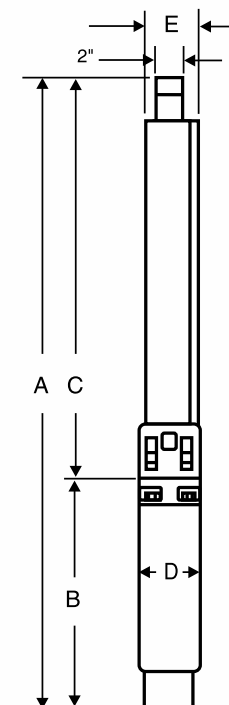


Fig. B